

Specifications

备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL


2. 特性 (characteristics):
 额定电流: 0.75 AMP
 Rating Current: 0.75 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to+105° C
 Temperature Range: -40° C to+105° C

Ordering Information

P5XX-12 XX XX X S XXX X 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full Cr Gold	Contact Plating Semi-gold	INSULATOR MATERIAL	INSULATOR LENGTH	PACKING
10: 1.0mm 15: 1.5mm 21: 2.1mm	2-50P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B: PA6T C: PA9T D: LCP	TERMINAL	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray

S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

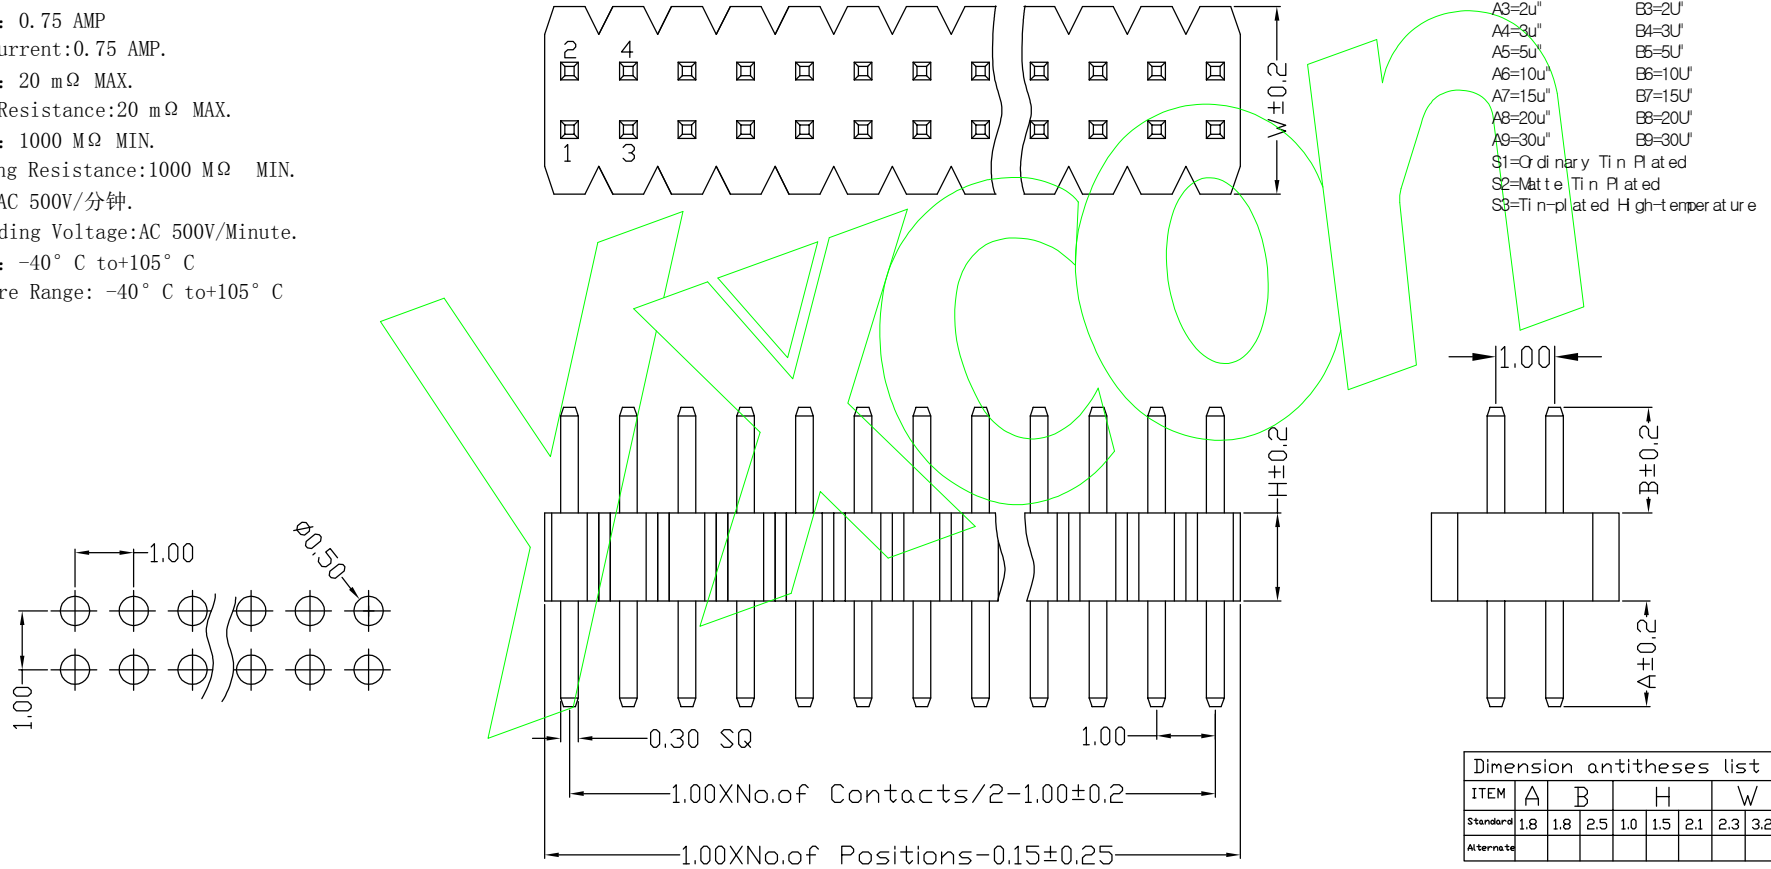

ITEM	A	B	H	W
Standard	1.8	1.8	2.5	1.0
Alternate	1.5	2.1	2.3	3.2

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	OPERATION	SCALE	Fit	Dongguan Yuxi Electronic Co., Ltd.			
				X.X ±0.25	UNIT	MM	Dongguan Yuxi Electronic Co., Ltd.			
				X.XX ±0.20	SIZE	A4	DESIGN	周芳杰 2021.6.12	PART NO	P5XX-12XXXXXXX1
				X.XXX ±0.10	SHEET	1/1	CHECK		TITLE	1.0间距 双排排针 单塑 180度
				Angle ±3°	PROJ.	☉	APPROVE		Customer No.	
				DIM TOL						



东莞市宇熙精密连接器有限公司
 Dongguan Yuxi Electronic Co., Ltd.

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 0.75 AMP

Rating Current: 0.75 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.


温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

Ordering Information

P5XX-22 XX XX X S XXX X 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full Cf Gold	Plating Semi-gold	INSULATOR MATERIAL: CF	LENGTH TERM NAL	PACKING
10: 1.0mm 15: 1.5mm	2-50P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U' B1=1U' B2=1.5U' B3=2U' B4=3U' B5=5U' B6=10U' B7=15U' B8=20U' B9=30U'	B: PA6T C: PA9T D: LCP		A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
		\$1=0 di nary Ti n Pl at ed \$2=Mat tle Ti n Pl at ed \$3=Ti n-pl at ed H gh-t emper at ure				

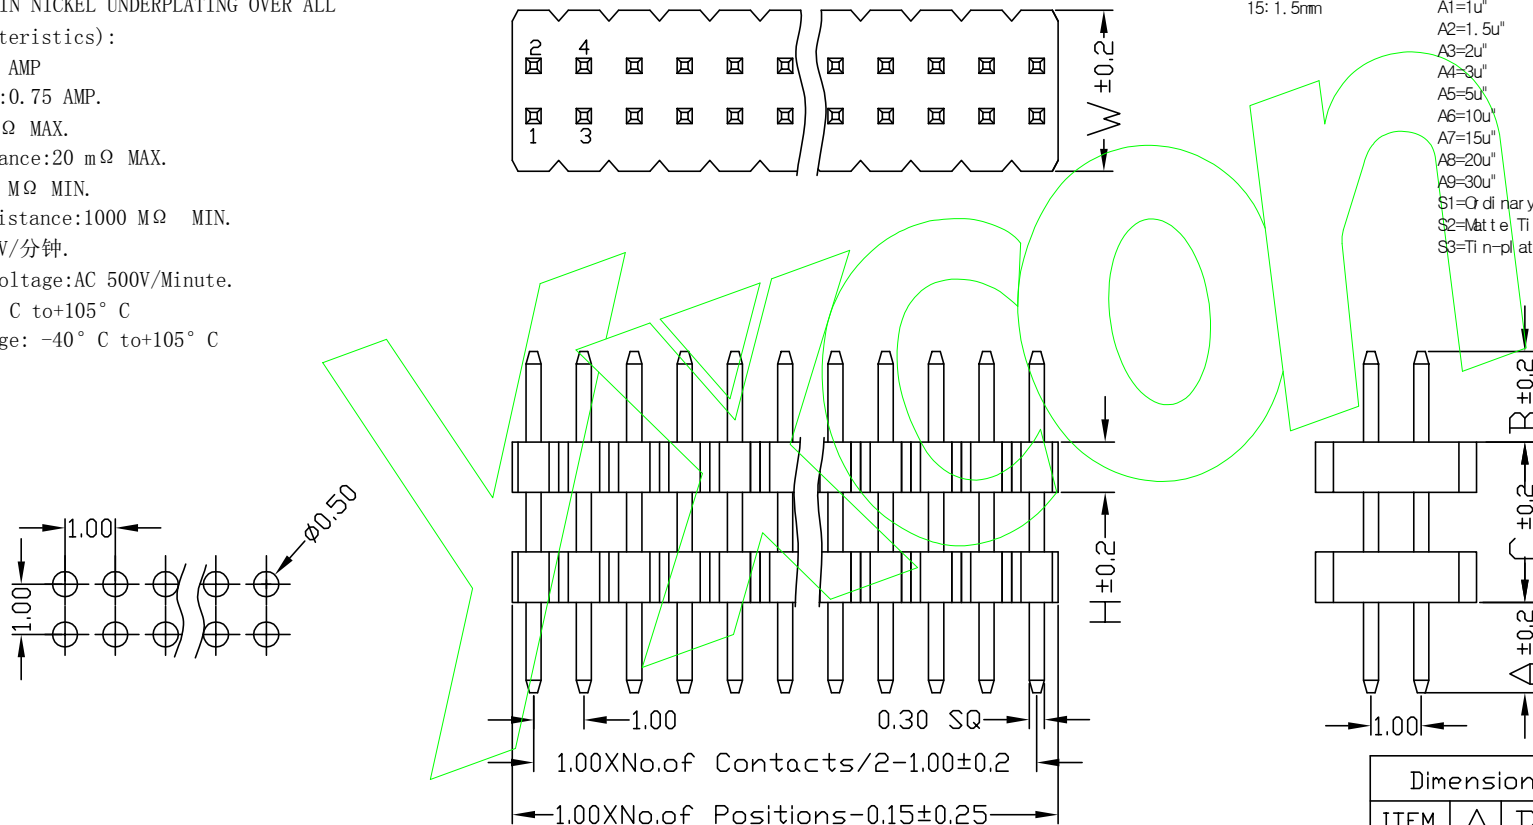

ITEM	A	B	H			W	
Standard	1.8	1.8	1.0	1.5	2.0	2.3	3.2
Alternate							

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	OPERATION		SCALE		Fit		DESIGN	周芳杰 2021.6.12	PART NO	P5XX-22XXXXXXX1
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SI ZE	A4	CHECK					
				X.XXX	±0.10	SHEET	1/1	APPROVE					
				Angle	±3°	PRQJ.	⊕ ⊖						
				DIM	TOL								

YXCON 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.

TI TLE: 1.0间距 双排排针 双塑 180度
Cust omer No.