

Specifications


备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA10T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA10T+30%G.F UL94V-0, Color: Black
 端子: 黄铜, 镍底30u", 表面镀金2u"
 Contact: Brass, 2u" GOLD PLATING OVER ALL
 30u" NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C


Ordering Information

F185-11 07 A3 K MU B 2T

NO. OF PINS PER ROW	Contact Full Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING
2-40P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	A: PBT B: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin plated High-temperature			

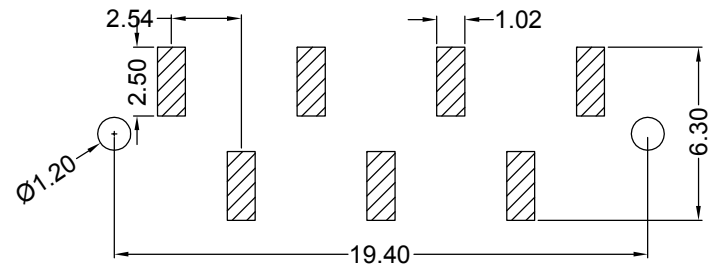

Recommended P.C.B LAYOUT
 General Tolerance ±0.05

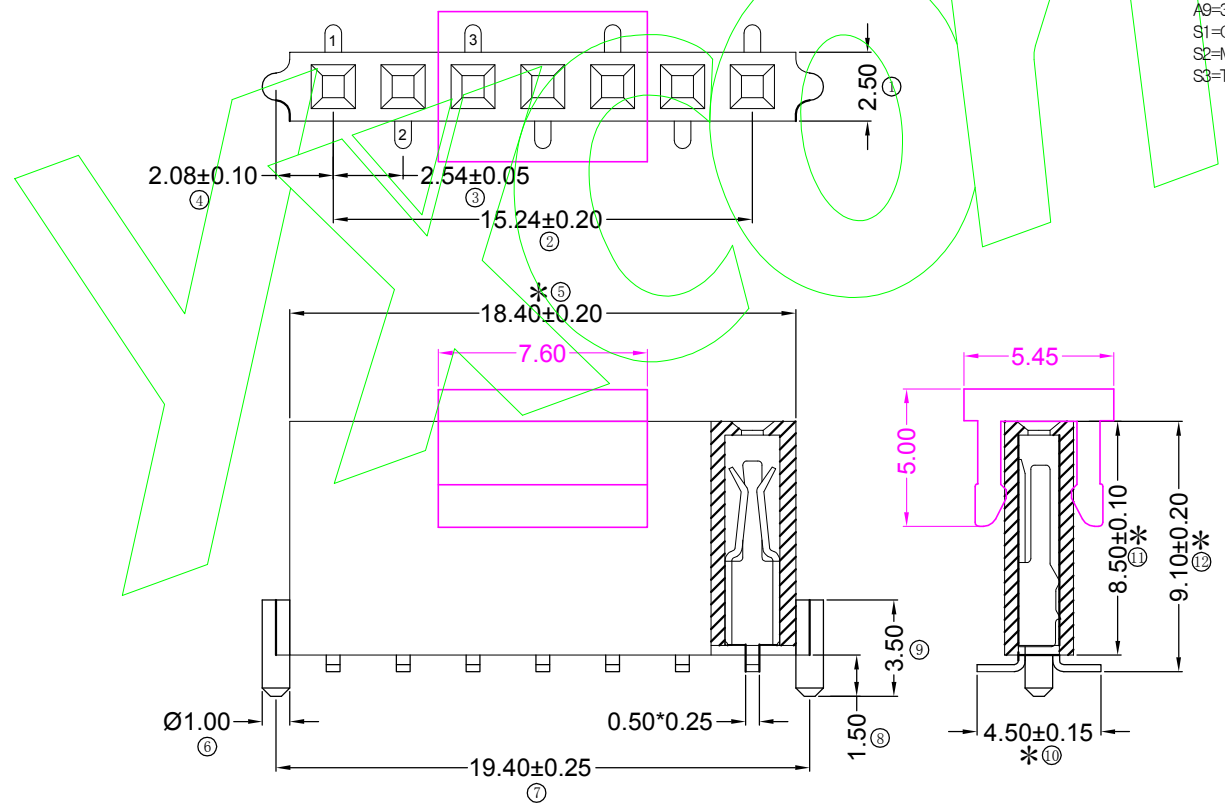

				OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
				X.X ±0.25	UNIT	MM				
				X.XX ±0.20	SIZE	A4	DESIGN	李青杰2023.05.02	PART NO	F185-1107A3KMUB2T
				X.XXX ±0.10	SHEET	1/1	CHECK		TITLE	FH2.54*8.5 1*7P SMT:4.5 带外柱Ø1.0*1.5 U型 青铜 PA10T料 镀金 CAP+450/卷装
REV	DATE	SYMBOL		MODIFICATION DESCRIPTION	PROJ.	APPROVE			Customer No.	