

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperature Range: -40°C to+105°C

Ordering Information

P3XX-12 XX XX X M XXX X 2





HEIGHT OF HOUSING
08: 0.8mm
10: 1.0mm
15: 1.5mm

NO. OF PINS PER ROW
2-50P

Contact Plating
Full Of Gold
Semi-gold

INSULATOR MATERIAL: OF
B: PA6T
C: PA6T
D: LCP

LENGTH OF TERMINAL
PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

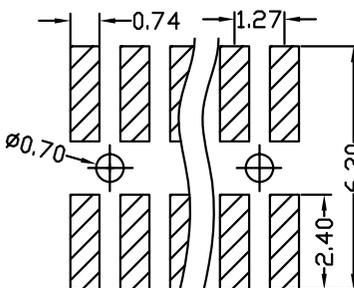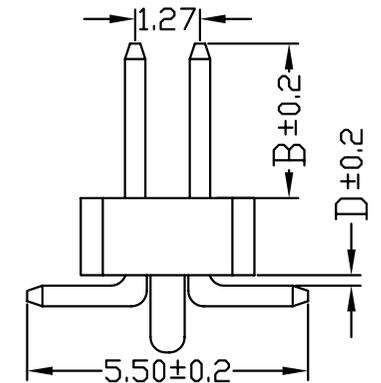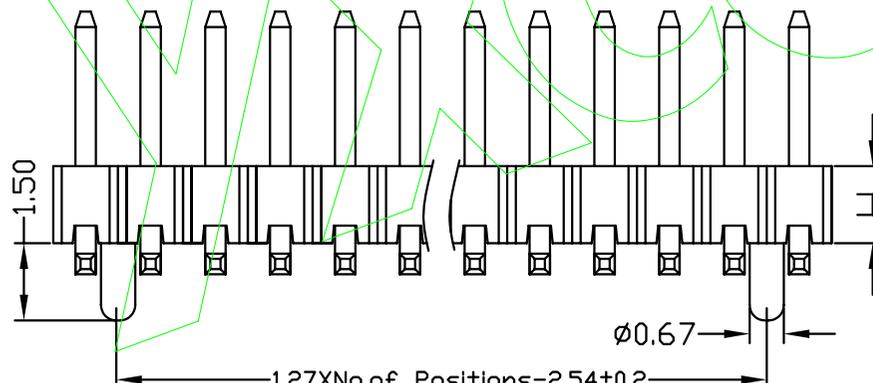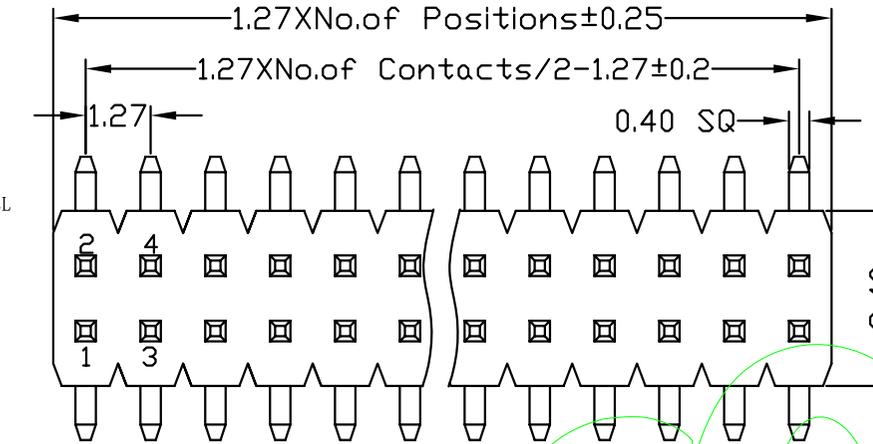

Dimension antitheses list

ITEM	D		B		H			
Standard	0	1.2	1.8	3.0	4.0	0.8	1.0	1.5
Alternate								

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P3XX-12XXXXXXMXXX2
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 双排 SMT 带柱
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	