

# Specifications


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PA6T+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN  
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):




额定电流: 1 AMP  
 Rating Current: 1 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40°C to+105°C  
 Temperature Range: -40°C to+105°C

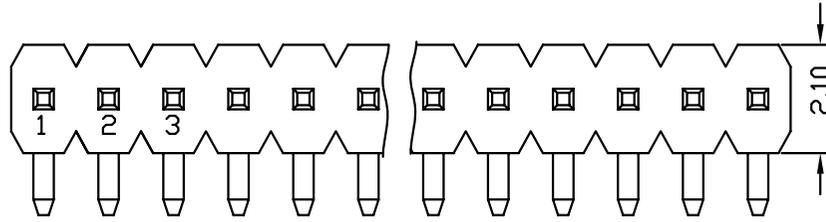

# Ordering Information

P310-11 XX XX X R XXX X 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
10:1.0mm	1~50P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B:PA6T C:PA9T D:LCP	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		\$1=Ordinary Tin Plated \$2=Matte Tin Plated \$3=Tin-plated High-temperature			

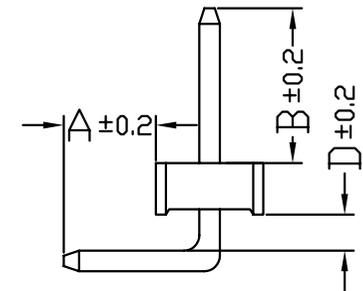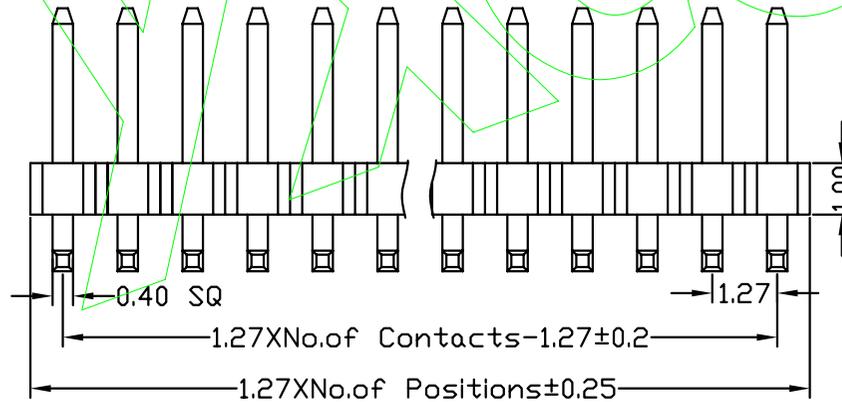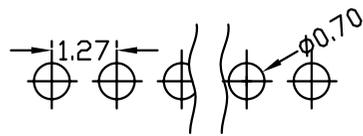

ITEM	A	B	D
Standard	1.8	1.8 3.0 4.0	0
Alternate			

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P310-11XXXXRXXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 单排 90度
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	