

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G. F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C

Temperture Range: -55° C to +125° C






F263-14XXXXSYX1



F263-24XXXXSYX1

Mating With/配對公座:
P215/P220

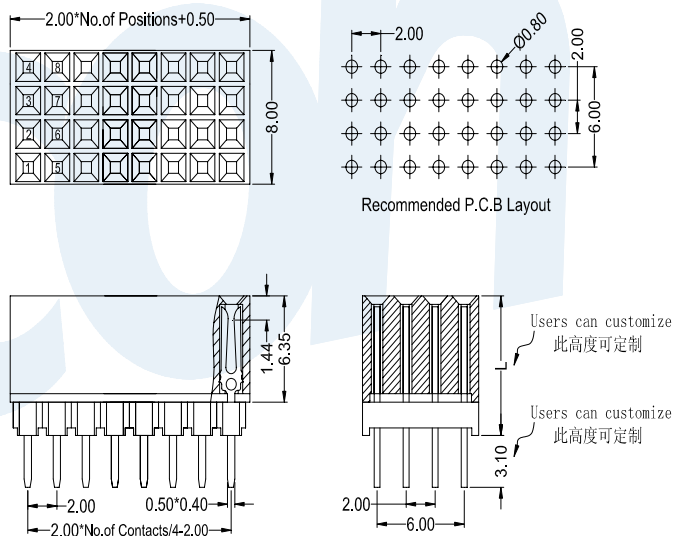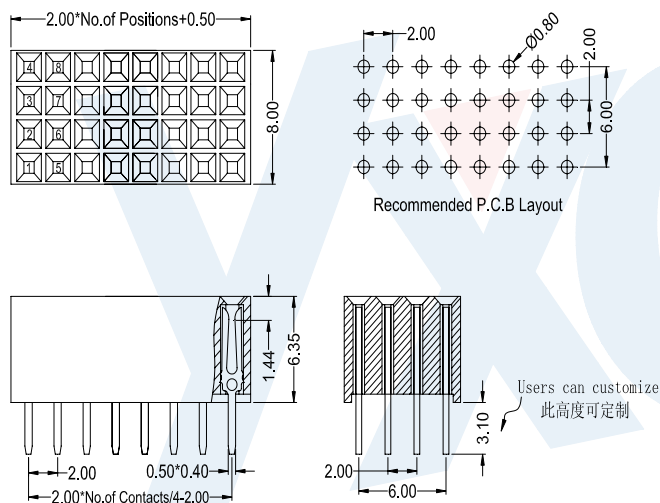

FEMALE HEADER

F 2 6 3 - 1 4

F 2 6 3 - 2 4

X X

No. Of Pins
Per Row
02~40P

X X

Contact Plating

Full Of Gold Semi-Gold

A0=0.8u" B0=0.8u"

A9=30u" B9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

X

Insulator Material:

B: PA6T

C: PA9T

D: LCP

S

Y

X

Packing

A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

1

Http://www.yxcon.com

E-mail: yx@yxcon.com

YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL: +86 769 85397456
TEL: +886 3313 2933

FAX: +86 769 85396015
FAX: +886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%+G. F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 2.00AMP

Rating Current: 2.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperture Range: -40° C to +105° C



F263-3430XXXSYX1

FEMALE HEADER

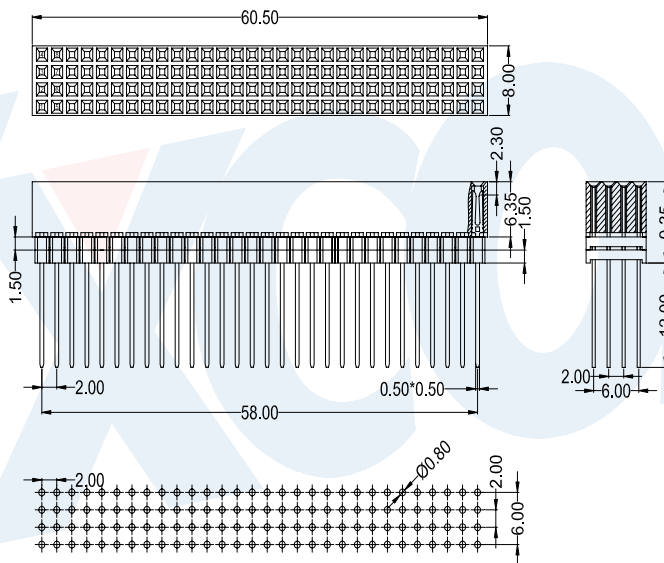

Recommended P.C.B Layout

F 2 6 3 - 3 4

30

XX

X

S

Y

X

1

Contact Plating

Full Of Gold Semi-Gold

A0=0.8u" B0=0.8U"

~ ~

A9=30u" B9=30U"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Insulator Material:

B:PA6T

C:PA9T

D:LCP

Packing

A:PE Bag

B:Tape & Reel

C:Tube

D:Tube+CAP

E:Tray

[Http://www.yxcon.com](http://www.yxcon.com)

E-mail:yx@yxcon.com

YUXI DONGGUAN (東莞)

TEL: +86 769 85397456

FAX: +86 769 85396015

YUXI TAIWAN (台灣)

TEL: +886 3313 2933

FAX: +886 3313 2935

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 1.5AMP

Rating Current: 1.5AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperture Range: -40° C to +105° C




F293-1430XXXSYX1



F293-1430XXXSYX2

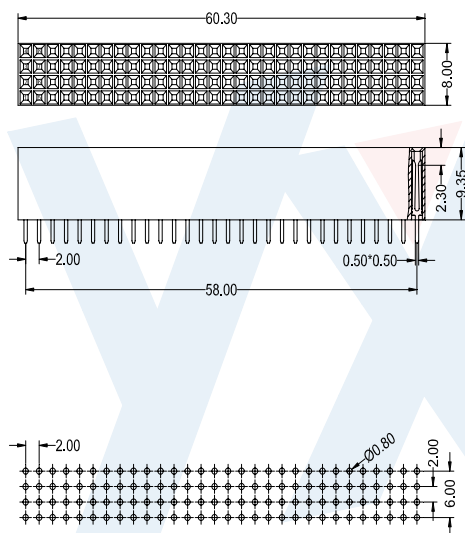

Recommended P.C.B Layout

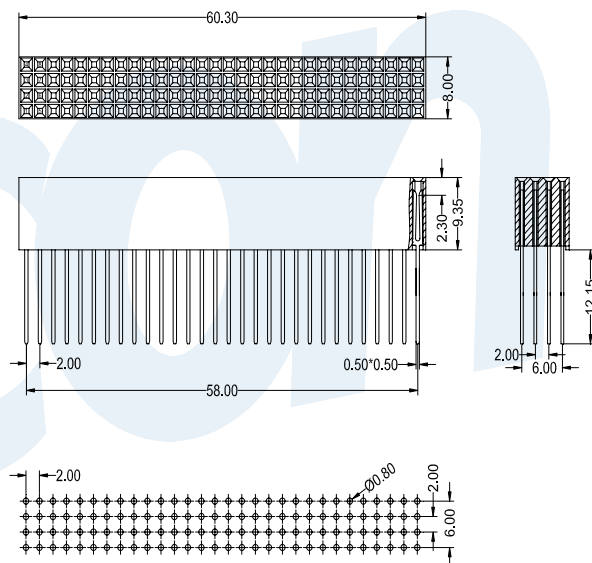

Recommended P.C.B Layout

F
FEMALE HEADER

F 2 9 3 - 1 4

30

X X

X

S

Y

X

X

Contact Plating

Full Of Gold Semi-Gold
A0=0.8u" B0=0.8U"

A9=30u" B9=30U"
S1=Ordinary Tin Plated
S2=Matte Tin Plated

S3=Tin-plated High-temperature

Insulator Material:

B:PA6T
C:PA9T
D:LCP

Contact Shape:

S:Straight

Packing

A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Journal Number

1:Type1
2:Type2

[Http://www.yxcon.com](http://www.yxcon.com)

E-mail:yx@yxcon.com


YUXI DONGGUAN (東莞)
YUXI TAIWAN (台灣)

TEL:+86 769 85397456
TEL:+886 3313 2933


FAX:+86 769 85396015
FAX:+886 3313 2935

Specifications

備注 (Remark)
1. 材料 (Material)
膠芯: PA9T/LCP+30%G. F UL94V-0, 顏色: 黑色
Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black
端子: 磷銅
Contact: Phosphor Bronze
2. 特性 (characteristics):
額定電流: 1.5AMP
Rating Current: 1.5AMP
接觸阻抗: 20mΩ Max
Contact Resistance: 20mΩ Max
絕緣阻抗: 1000MΩ Min
Insulating Resistance: 1000 MΩ Min
耐電壓: AC 500V/分鐘
Withstanding Voltage: AC 500V/Minute
溫度範圍: -40° C to +105° C
Temperture Range: -40° C to +105° C





F293-1430XXXSYX3



F293-1430XXXSYX4

F
FEMALE HEADER

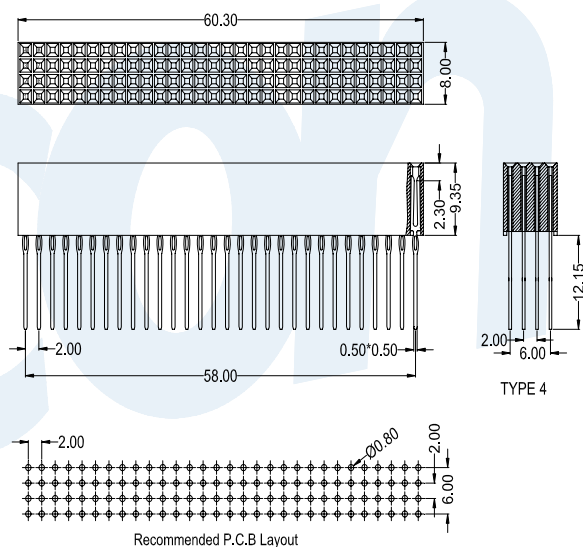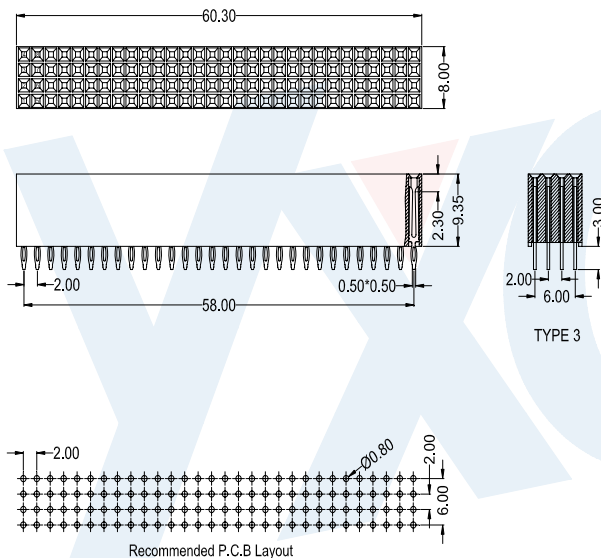

F 2 9 3 - 1 4

XX

XX

X

S

Y

X

X

No.Of Pins Per Row
20:20P
30:30P

Contact Plating
Full Of Gold
A0=0.8u"
~
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
B:PA6T
C:PA9T
D:LCP

Contact Shape:
S:Straight

Packing
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Journal Number
3:Type3
4:Type4