

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL




2. 特性 (characteristics):

额定电流: 3 AMP
 Raring Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40° C to +105° C
 Temperture Range: -40° C to +105° C

Ordering Information

P033-11 XX XX X R 155 X 1

HEIGHT OF HOUSING 33:3.3mm	NO.OF PINS PER ROW 1-40P	Contact Plating		INSULATOR MATERIAL: A: PBT B: PA6T C: PA9T D: LCP	LENGTH OF TERMINAL	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
		Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"			
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

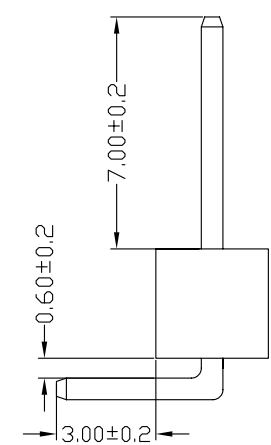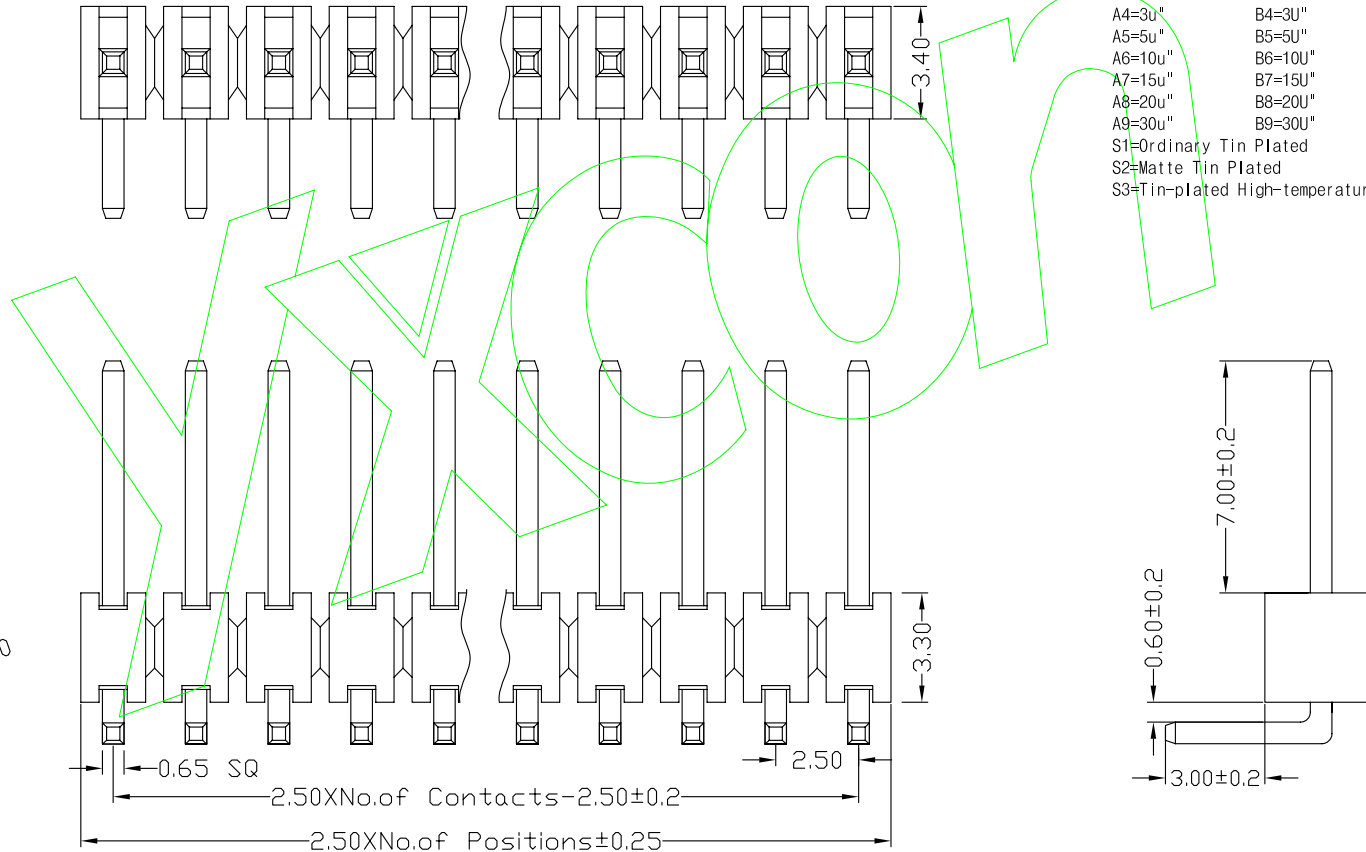

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	庞国杰	PART NO.	P033-11XXXXXR155X1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.50mm 单排针 塑高3.3 90度 L=15.5
				Angle	±3°	PROJ.		APPROVE		Customer No.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL					