

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.
 Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):




额定电流: 3 AMP
 Raring Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to+105°C
 Temperature Range: -40°C to+105°C



Ordering Information

P1XX-21 XX XX X S XXX X 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm 17:1.7mm 20:2.0mm 25:2.54mm	1~40P	Full Of Gold	Semi-gold	A:PBT B:PA6T C:PA9T D:LCP		A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"			
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

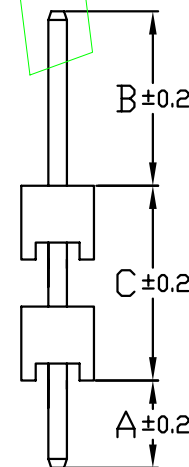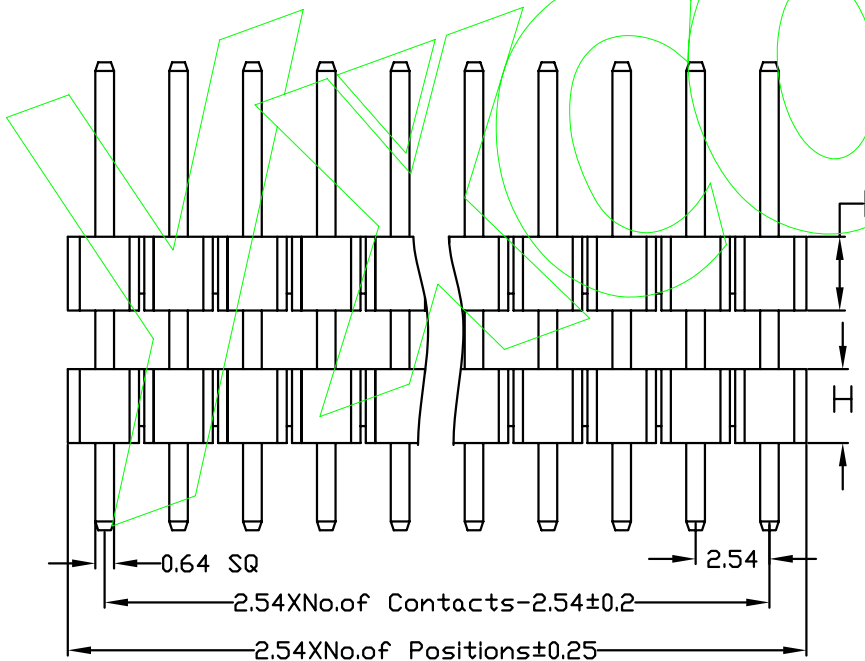

ITEM	A	B	H		C	
Standard	3.0	6.0	1.5	1.7	2.0	2.54
Alternate						

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P1XX-21XXXXXXSXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 单排针 双塑 180度
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	