

Specifications


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.
 Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):




额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to+105°C
 Temperature Range: -40°C to+105°C

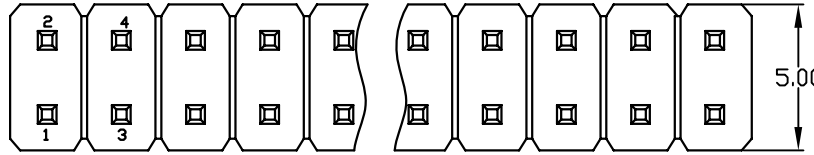

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm	2-40P	Full Of Gold	A: PBT		A: PE Bag
17:1.7mm		A0=0.8u"	B: PA6T		B: Tape & Reel
20:2.0mm		A1=1u"	C: PA9T		C: Tube
25:2.54mm		A2=1.5u"	D: LCP		D: Tube+CAP
30:3.0mm		A3=2u"			E: Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

Ordering Information

P1XX-22 XX XX X S XXX X 1

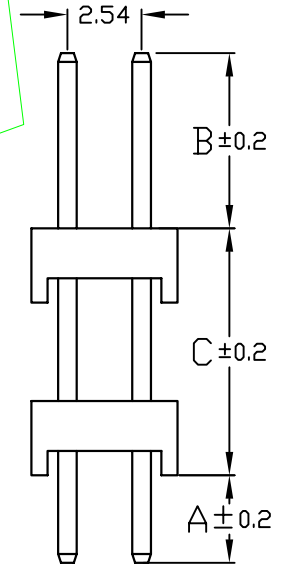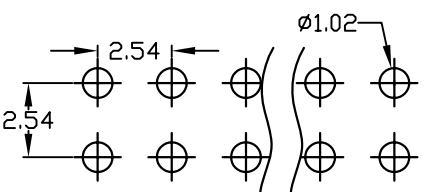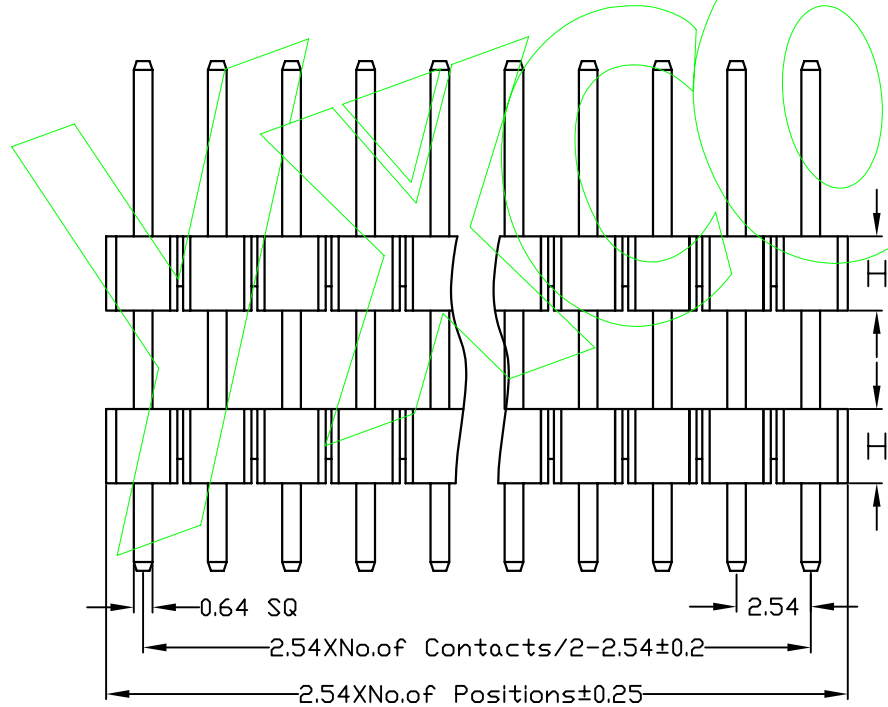

ITEM	A	B	H			C	
Standard	3.0	6.0	1.5	1.7	2.0	2.54	3.0
Alternate							

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE	Fit	DESIGN	PART NO.	TITLE:
					X.X	±0.25					
					X.XX	±0.20	SIZE	A4	DESIGN	P1XX-22XXXXX1	2.54mm 双排针 双塑 180度
					X.XXX	±0.10	SHEET	1/1	CHECK		
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.
					DIM	TOL					

Yxcon 东莞市宇熙精密连接器有限公司
 Dongguan Yuxi Electronic Co.,Ltd.

卢小强

PART NO. P1XX-22XXXXX1
 TITLE: 2.54mm 双排针 双塑 180度