

Specifications

备注 (Remark)

1. 材料 (MATERIAL)


胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):





额定电流: 1 AMP
 Rating Current: 1 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to+105°C
 Temperature Range: -40°C to+105°C

Ordering Information

F343-12 XX XX X SF X 1

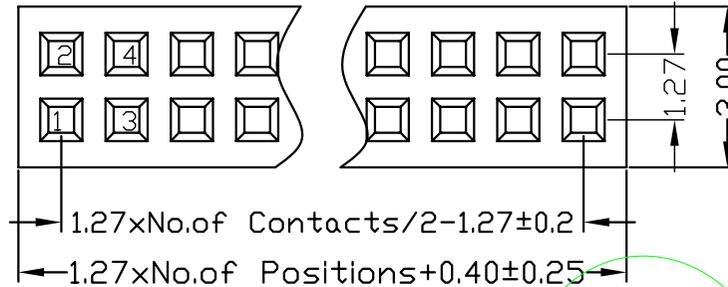

NO. OF PINS PER ROW 2-50P	Contact Plating		+INSULATOR MATERIAL:	PACKING
	Full Of Gold	Semi-gold	B:PA6T	A:PE Bag
	A0=0.8u"	B0=0.8U"	C:PA9T	B:Tape & Reel
	A1=1u"	B1=1U"	D:LCP	C:Tube
	A2=1.5u"	B2=1.5U"		D:Tube+CAP
	A3=2u"	B3=2U"		E:Tray
	A4=3u"	B4=3U"		
	A5=5u"	B5=5U"		
	A6=10u"	B6=10U"		
	A7=15u"	B7=15U"		
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

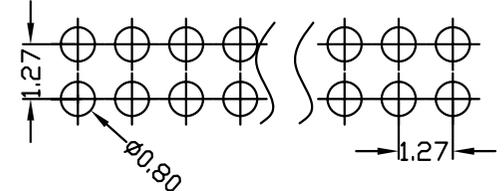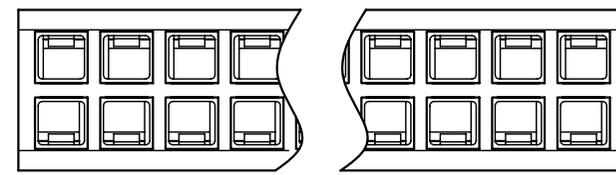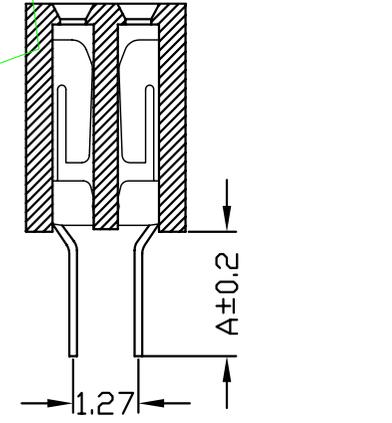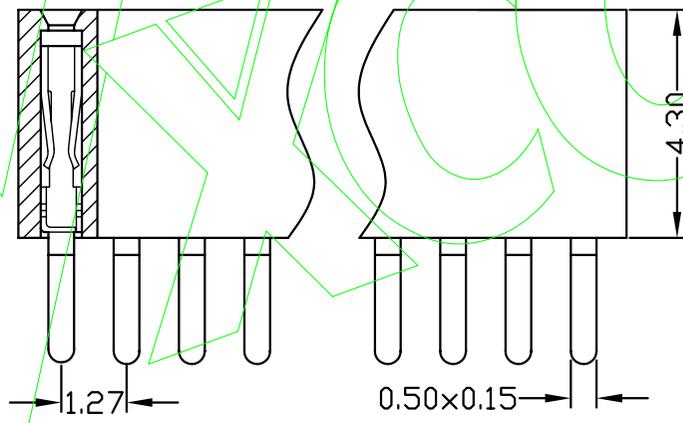

DIM"A"	2.40	2.00
--------	------	------

封口端子图

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F343-12XXXXXSFX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm 双排母 塑高4.3 180度 封口
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.