

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

Ordering Information

F243-11 XX XX X RU X 1

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
1~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature		

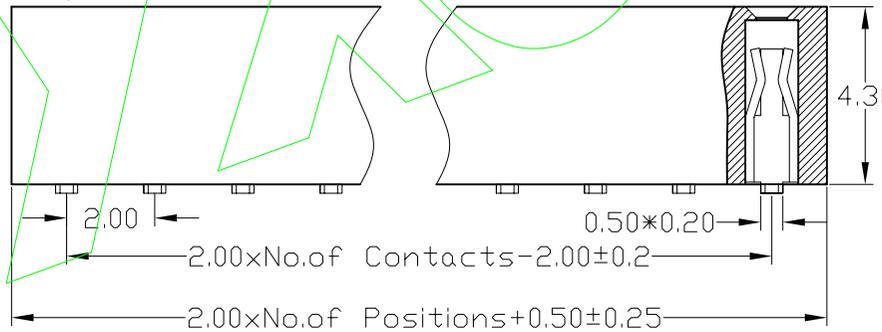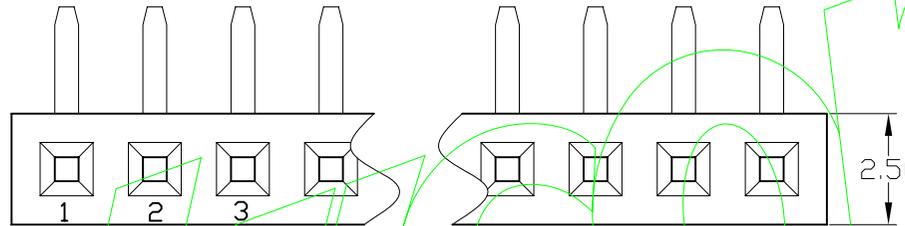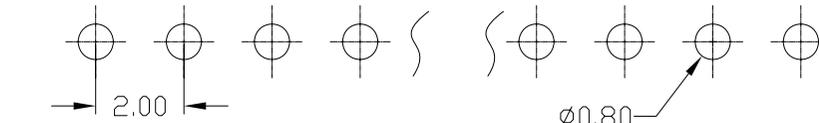

						OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.			
						X.X ±0.25	UNIT	MM				
						X.XX ±0.20	SIZE	A4	DESIGN	庞国杰	PART NO.	F243-11XXXXXSUX1
						X.XXX ±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 单排母 塑高4.3 90度 U型
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle ±3°	PROJ.	APPROVE			Customer No.	
						DIM TOL						