

# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.



温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

# Ordering Information

F243-11 XX XX X MU X 1

NO. OF PINS PER ROW 1-40P	Contact Plating	INSULATOR MATERIAL:	PACKING	TYPE1:1
	Full Of Gold	B:PA6T	A:PE Bag	TYPE2:2
	Semi-gold	C:PA9T	B:Tape & Reel	
	A0=0.8u"	D:LCP	C:Tube	
	A1=1u"		D:Tube+CAP	
	A2=1.5u"		E:Tray	
	A3=2u"			
	A4=3u"			
	A5=5u"			
	A6=10u"			
	A7=15u"			
	A8=20u"			
	A9=30u"			
	\$1=Ordinary Tin Plated			
	\$2=Matte Tin Plated			
	\$3=Tin-plated High-temperature			

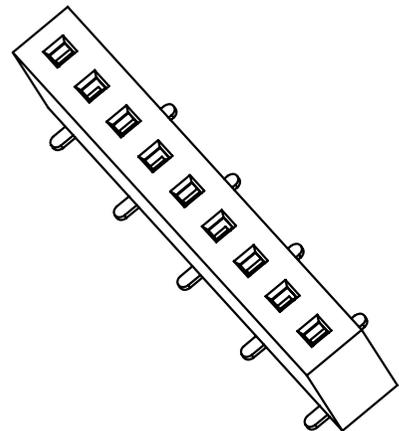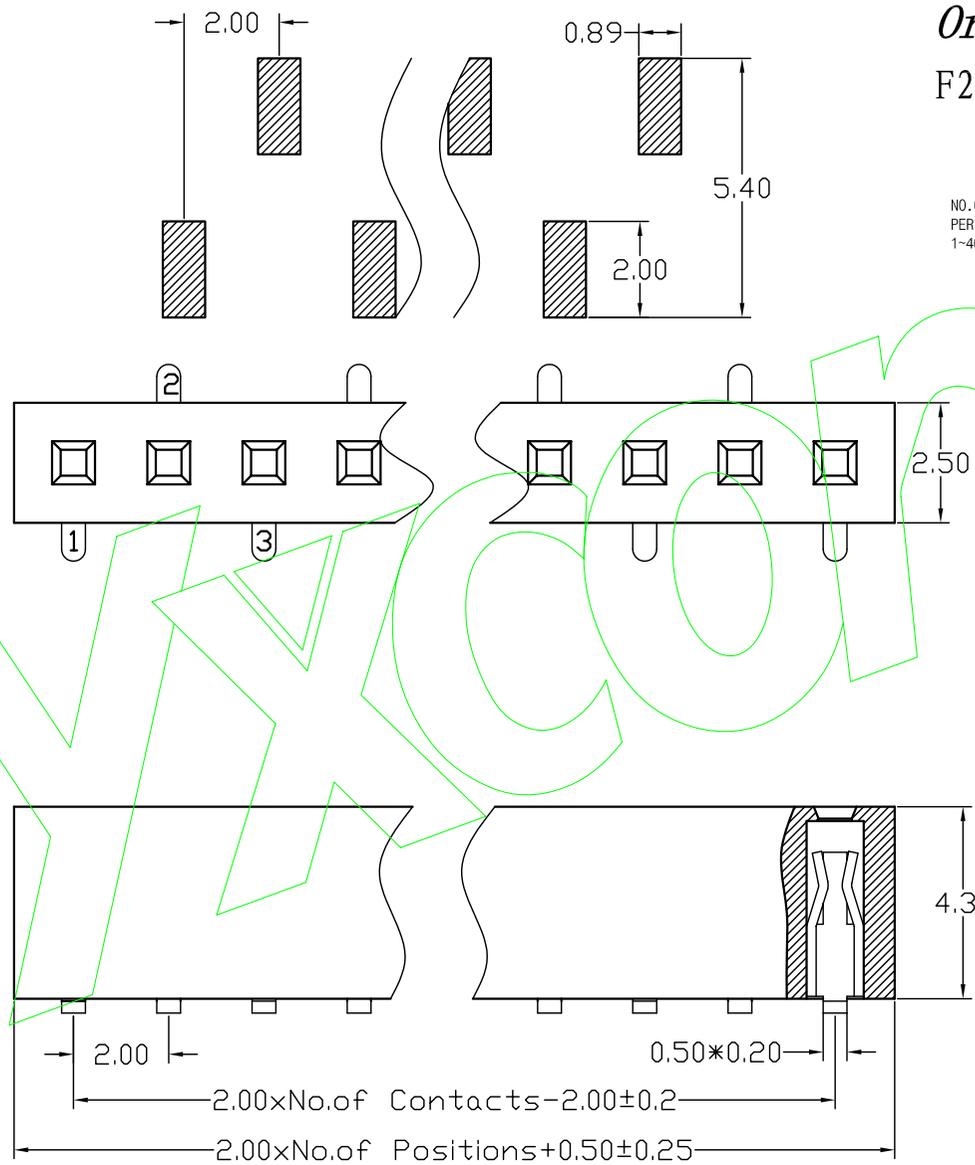

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F243-11XXXXMUX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 单排母 塑高4.3 SMT U型 正脚位
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	