

# Specifications





# Ordering Information

F243-12 XX XX X SF X 1


备注 (Remark)  
 1. 材料 (MATERIAL)  
 胶芯: PBT/PA6T+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PBT/PA6T+30%G.F UL94V-0, Color: Black  
 端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN  
 Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):  
 额定电流: 1 AMP  
 Rating Current: 1 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40°C to +105°C  
 Temperature Range: -40°C to +105°C

NO. OF PINS PER ROW 2-50P	Full Of Gold	Semi-gold	+INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	B:PA6T	A:PE Bag	
A1=1u"	B1=1U"	C:PA9T	B:Tape & Reel	
A2=1.5u"	B2=1.5U"	D:LCP	C:Tube	
A3=2u"	B3=2U"		D:Tube+CAP	
A4=3u"	B4=3U"		E:Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

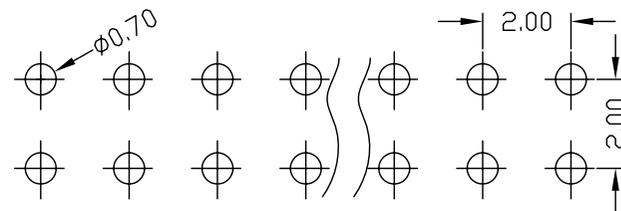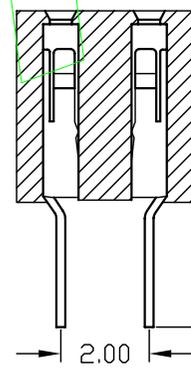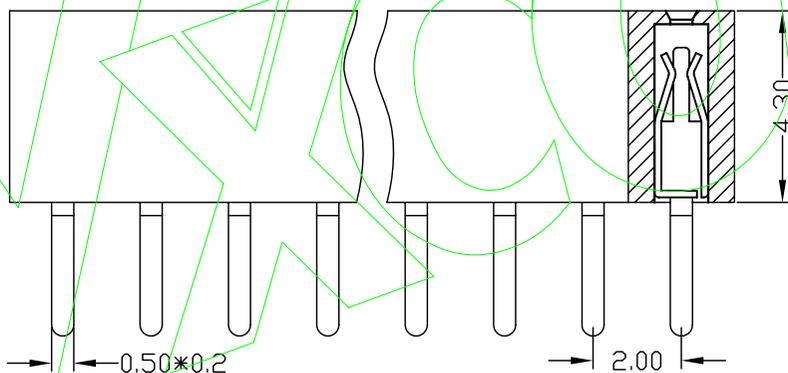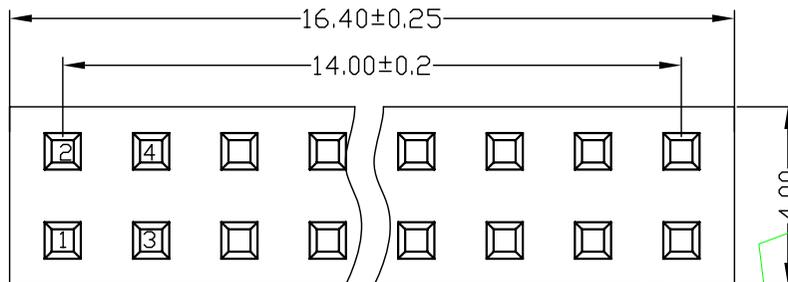

封口端子图

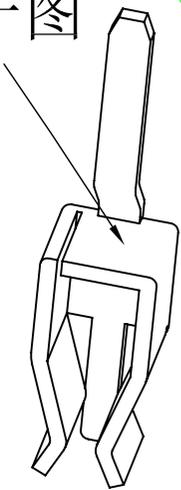

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
					X.X	±0.25	UNIT	MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F243-12XXXXXSFX1
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 双排母 塑高4.3 180度 封口
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.	
					DIM	TOL						