

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

Ordering Information

F185-12 XX XX X RY X 1

NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	PACKING
2~40P	Full Of Gold	Semi-gold	A: PBT	A: PE Bag
A0=0.8u"	B0=0.8U"	B1=1U"	B: PA6T	B: Tape & Reel
A1=1u"	B2=1.5U"	B3=2U"	C: PA9T	C: Tube
A2=1.5u"	B4=3U"	B5=5U"	D: LCP	D: Tube+CAP
A3=2u"	B6=10U"	B7=15U"		E: Tray
A4=3u"	B8=20U"	B9=30U"		
A5=5u"				
A6=10u"				
A7=15u"				
A8=20u"				
A9=30u"				
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

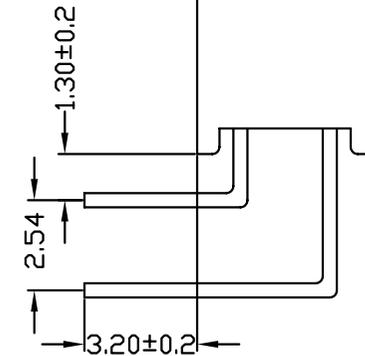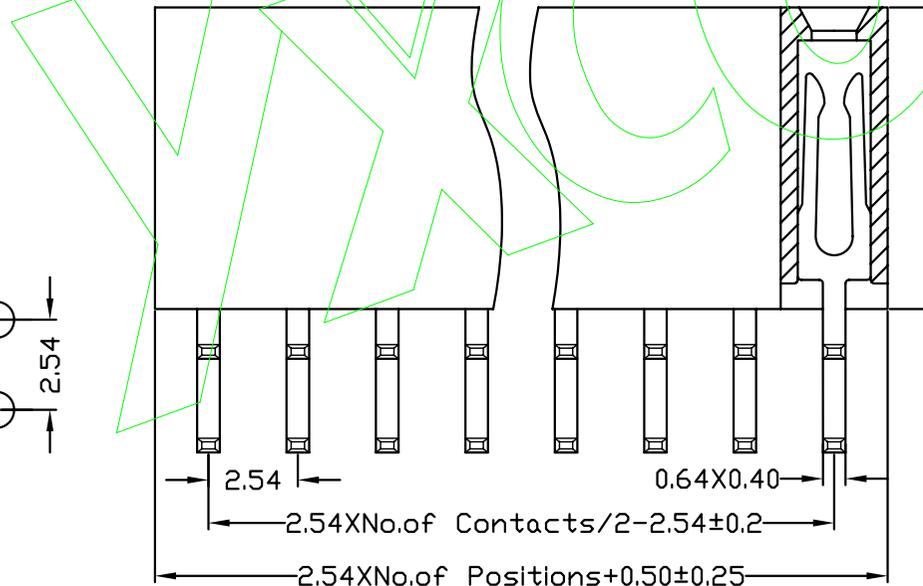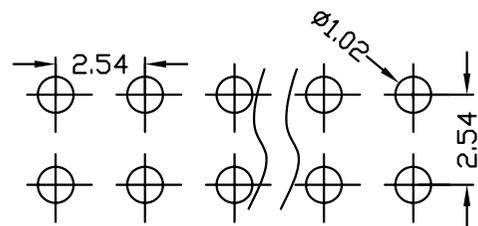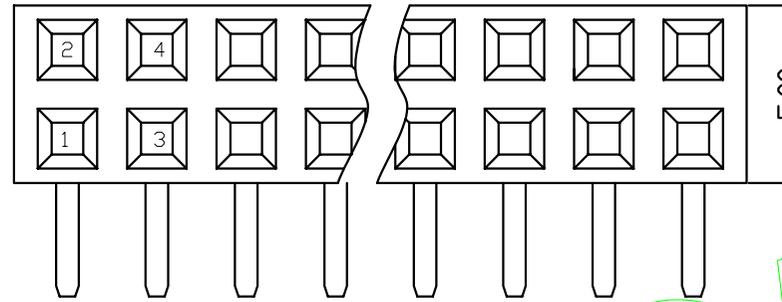

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F185-12XXXXRYX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 双排母 塑高8.5 90度 Y型
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.