

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperature Range: -40°C to+105°C

Ordering Information

E20X-1 XX XX X S X X 1



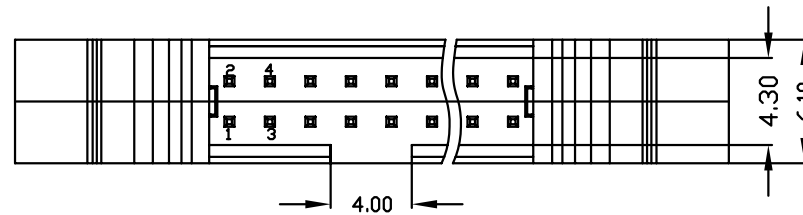


1. LONG-EARED	NO. OF PINS	Contact Plating	INSULATOR MATERIAL:	B: Black	PACKING
2. SHORT-EARED	6-64P	Full Of Gold	B: PA6T	E: Grey413	A: PE Bag
		A0=0.8u"	C: PA9T	W: White	C: Tube
		A1=1u"	D: LCP	U: Blue	D: Tube+CAP
		A2=1.5u"			E: Tray
		A3=2u"			
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

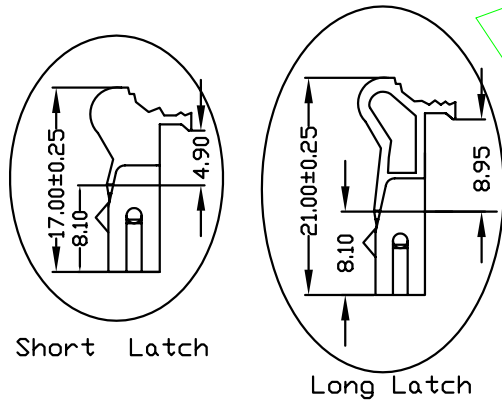

Short Latch

Long Latch

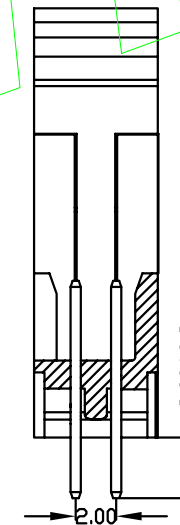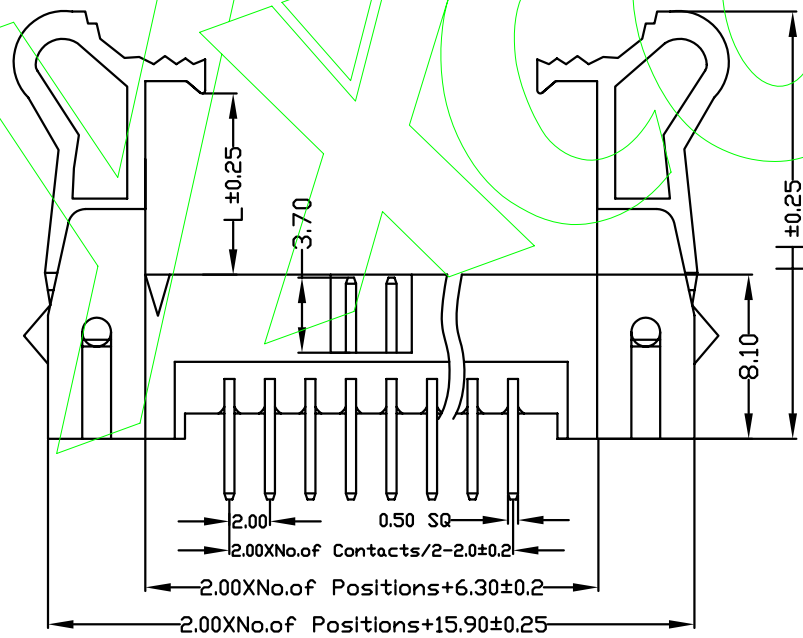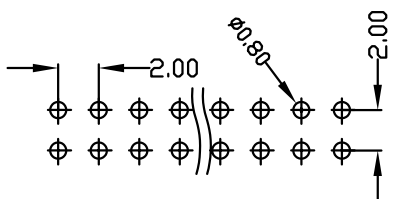

NAME	PART NO
Long Latch	E201-1XXXXXSXX1
Short Latch	E202-1XXXXXSXX1

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强		PART NO.	E20X-1XXXXXSXX1
				X.XXX	±0.10	SHEET	1/1	CHECK			TITLE:	2.0mm 牛角 180度
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.		