

Specifications


备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to+105° C
 Temperature Range: -40° C to+105° C

Ordering Information

B248-2 XX XX X S X X 1

NO. OF PINS	Contact Plating	INSULATOR MATERIAL	BACK	PACKING
6-68P	Full of Gold	Semi-gold	Grey427	PE Bag
A0=0.8u"	B0=0.8U'	B PA6T	E: Grey413	Tape & Reel
A1=1u"	B1=1U'	C PA9T	White	Tube
A2=1.5u"	B2=1.5U'	D LCP	Blue	Tube+CAP
A3=2u"	B3=2U'			Tray
A4=3u"	B4=3U'			
A5=5u"	B5=5U'			
A6=10u"	B6=10U'			
A7=15u"	B7=15U'			
A8=20u"	B8=20U'			
A9=30u"	B9=30U'			
S1=Ordinary	Tin Plated			
S2=Matte	Tin Plated			
S3=Tin-plated	High-temperature			

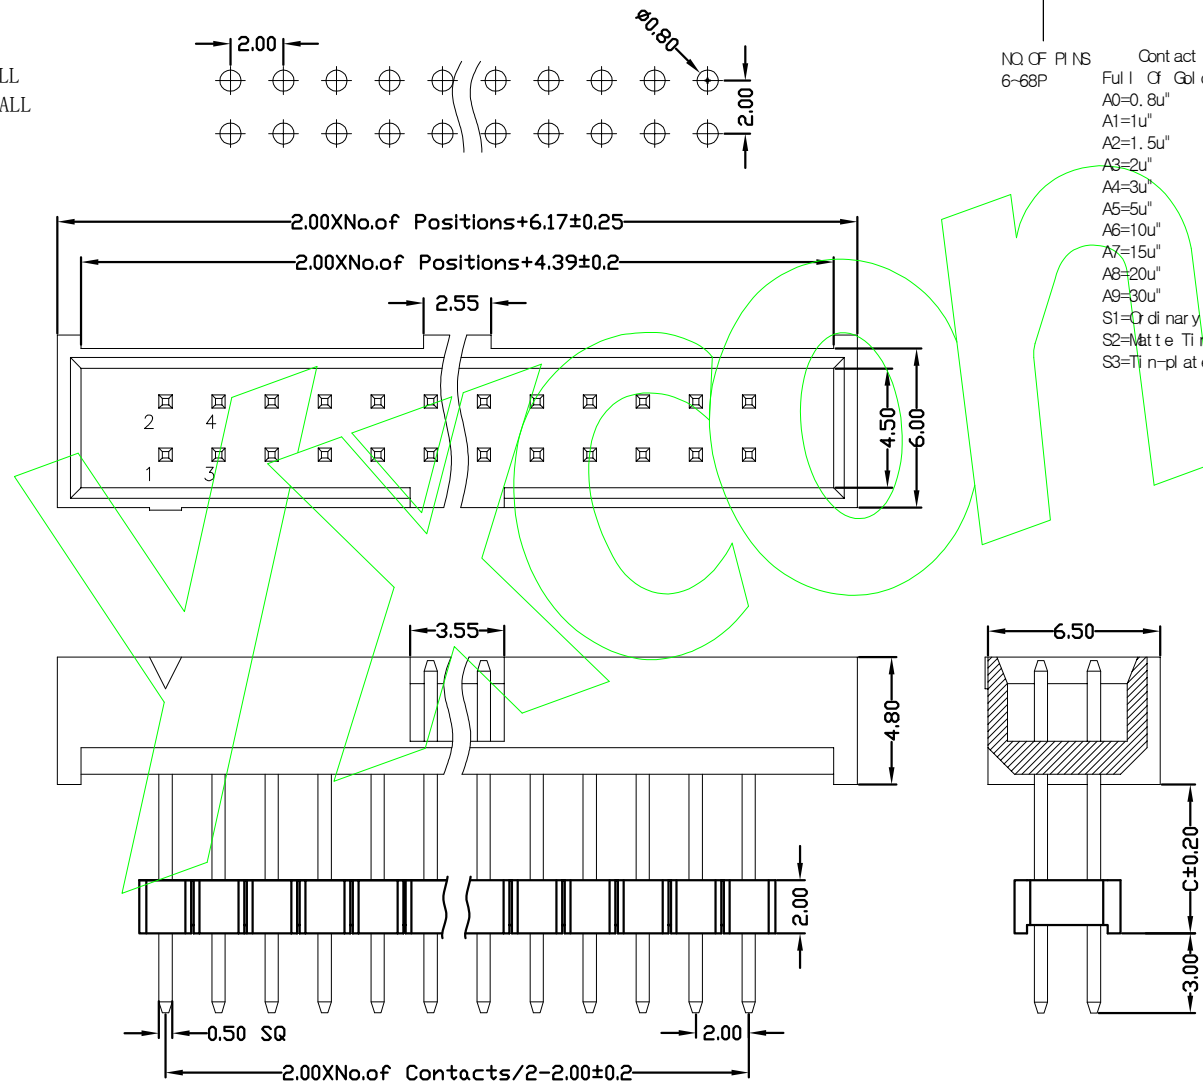

			OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.			
			X.X ±0.25	UNIT	MM				
			X.XX ±0.20	SIZE	A4	DESIGN	周芳杰 2021.7.2	PART NO	B248-2XXXXXX1
			X.XXX ±0.10	SHEET	1/1	CHECK		TITLE	2.0间距 筒牛 塑高4.8 180度 长体
			Angle ±3°	PROJ.	APPROVE			Customer No.	
			DIM TOL						
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION						