

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 黄铜, 镍底30u~Min, 表面镀普金
Contact: Brass, GOLD PLATING OVER ALL
30u~Min NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电压: 125V AC/DC
Rated voltage: 125V AC/DC
额定电流: 2 AMP
Rating Current: 2 AMP.
接触阻抗: 10 mΩ MAX.
Contact Resistance: 10 mΩ MAX.
绝缘阻抗: 100 MΩ MIN.
Insulating Resistance: 100 MΩ MIN.
耐电压: AC 500V/分钟.
Withstanding Voltage: AC 500V/Minute.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

客编: K1009





1. 2.0间距错位排针 排距3.5MM。

注意
事项

Ordering Information

P275-12 04 A0 B R200 A 1

HEIGHT OF HOUSING	NO OF PINS PER ROW	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	2-40P	A0=0.8u"	B0=0.8U'	B: PA6T		A: PE Bag
17: 1.7mm		A1=1u"	B1=1U'	C: PA9T		B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5U'	D: LCP		C: Tube
25: 2.54mm		A3=2u"	B3=2U'			D: Tube+CAP
30: 3.0mm		A4=3u"	B4=3U'			E: Tray
		A5=5u"	B5=5U'			
		A6=10u"	B6=10U'			
		A7=15u"	B7=15U'			
		A8=20u"	B8=20U'			
		A9=30u"	B9=30U'			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin plated High-temperature				
		S4=High Temperature Matte Tin				

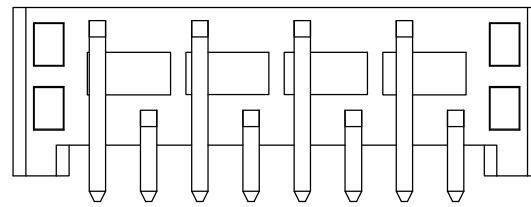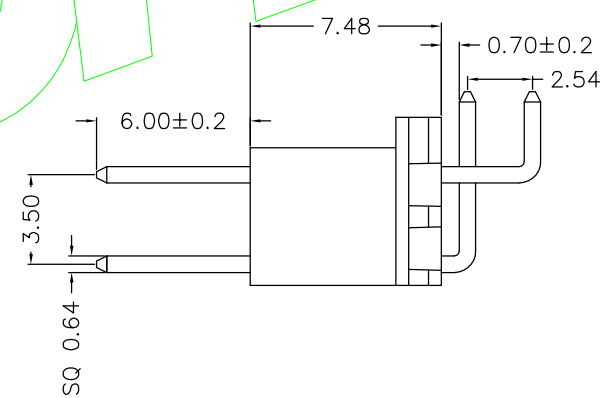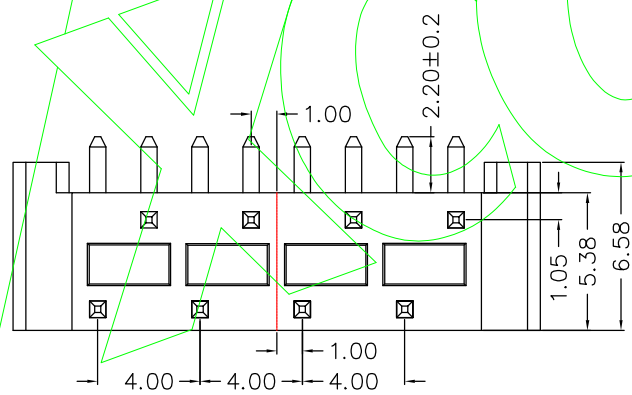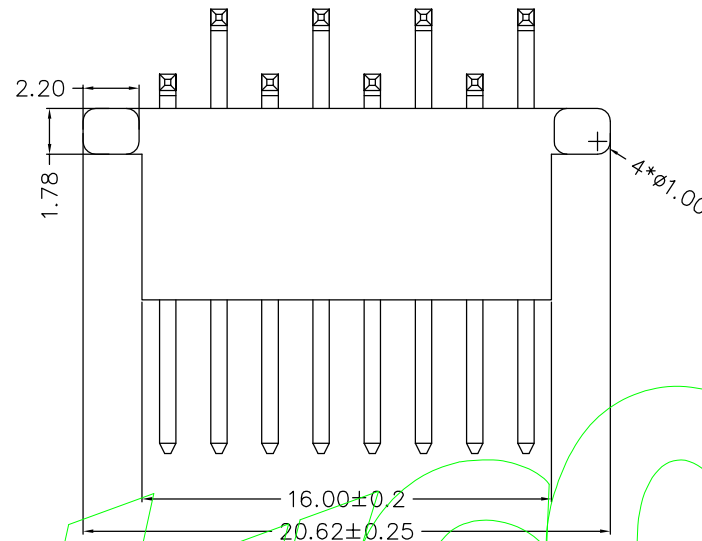

OPERATION		SCALE	Fit	DATE
X.X	+0.20	UNIT	MM	2018/10/10
X.XX	+0.15	SIZE	A4	DESIGN
X.XXX	+0.10	SHEET	1/1	CHECK
Angle	+13°	PROJ.	APPROVE	
DIM	TOL			

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.

杨哲 PART NO. P275-1204A0BR200A1

TI TLE: 2.0间距错位排针 2*4P L=20.0/21.0 90度 排距3.5MM H=7.48MM PA6T料 镀普金 袋装 K1009

Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
1				