

# Specifications

# Ordering Information

BZ38-11 02 S4 D R 168 F 2T

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀高温雾锡80u"MIN

Contact: Brass, 80u"MIN HIGH TEMPRETURE MATTE TIN OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电压: 250V AC/DC

Rated Voltage: 250V AC/DC

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.







Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 800V/分钟.

Withstanding Voltage: AC 800V/Minute.

温度范围: -25° C to +105° C

Temperature Range: -25° C to +105° C

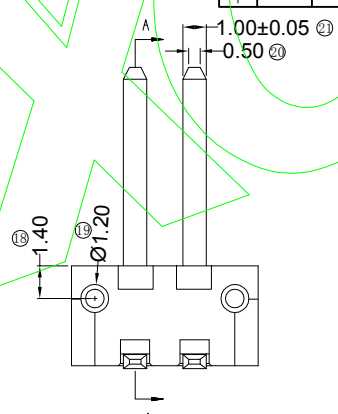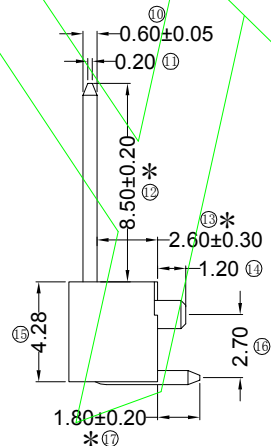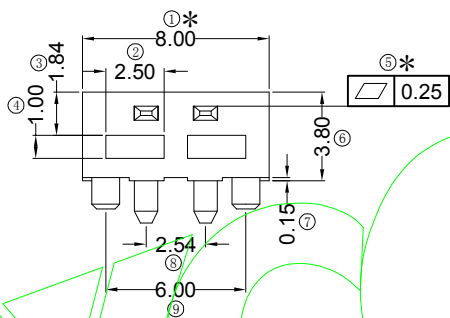


HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	2~40P	Full Of Gold	Semi-gold	A: PBT	A: PE Bag	B: Tape & Reel
17: 1.7mm		A0=0.8u"	B0=0.8U"	B: PA6T	C: Tube	D: Tube+CAP
20: 2.0mm		A1=1u"	B1=1U"	C: PA9T	E: Tray	
25: 2.54mm		A2=1.5u"	B2=1.5U"	D: LCP		
30: 3.0mm		A3=2u"	B3=2U"			
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

RoHS COMPLIANT

客编: V1195

注意事项  
1. 带\*为品质重点检验尺寸.



			OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co., Ltd.			
			X.X	±0.40	UNIT		MM					
			X.XX	±0.25	SIZE	A4	DESIGN	李官森2022.08.05	PART NO		BZ38-1102S4DR168F2T	
			X.XXX	±0.15	SHEET	1/1	CHECK		TITLE:		2.54间距扁针 1*2P L=16.8/1.8(0)/8.5 90度 带柱Φ1.2*1.2 LCP 高温雾锡80U 540+40PCS/防静电卷装(上下带双面) V1195	
A0	2022.08.05	/	新版发行		APPROVE				Customer No.			
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION		PRQJ.							